


A. Package content

- CDX1 · Installation Guide X 1
- Accessory kit X 1
- (Plastic screw X 4, Fastening screw X 4)

B. Specification

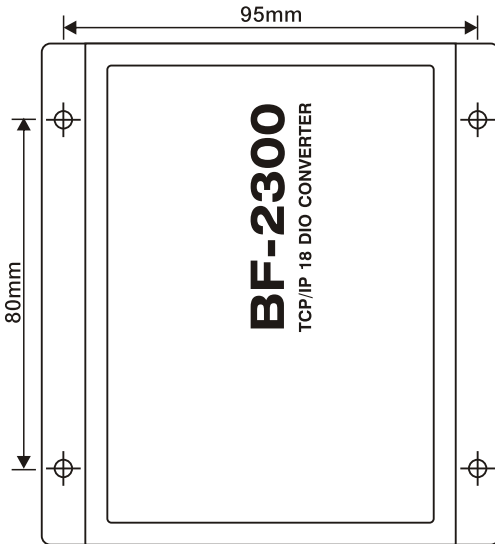

| Item | Specification |
|--------------------------|---|
| Input | 12 sets serial input / Terminal block for connection / Optocoupler isolation : 2,500V(DC) / Voltage over-load protection : 70V(DC) |
| Output | 6 sets serial output / Terminal block for connection / Optocoupler isolation : 2,500V(DC) / Built-in relay (Made in Japan) : 30V(DC),1A |
| Network interface | 1 RJ-45 Port / 10/100Base-T Entire/half-duplex support / Jumper automatic detection |
| RS-485 | 1 RS-485 / Terminal block for connection / Farthest transmitting range 1200 meters |
| RS-232 | RXD /TXD /GND / Terminal block for connection / Farthest transmitting range 15 meters |
| LED Indicator | Power status / Network condition / 1 RS-485 Condition / Operation indicating / 1 RS-232 Condition |
| Power | DC 9 -24V , 1A |
| Operating temperature | 0°C ~ 65°C |
| Time memory function | Use the golden electric capacity design, No need to replace the battery, After cut off power, Time memory could be hold one week |
| Weight | 425 g. |
| Dimensions (L x W x H) | 115X105X34 mm |

C. System Connection

1~6 Output Relay
Action switching guide
(Need to move case)

